


Meeting Minutes		LW104 CH 4002	
Date / Time	02/05/20 14:30		
Location	Tech Serv.		
Chairperson	Neil Bryan		
Attendees	Name	Initial	
Undermanager	Neil Bryan	NB	
Mine Geologist	James McGuiness	JM	
LW Mining Co-Ordinator	Mick Copeland	MC	
Roster Geotech.	Ed Steed	ES	
Undermanager	Adam Kruse	BC	
VO	Mark Johnston	MJ	
Apologies			
-			
File Location	W:\Technical Services\Shared\ LW104\11. IMT Minutes\SMRT\		
Minutes Taken / Updated by	James McGuiness		
Objective	Review conditions and determine a plan for going forward		
Ref	Description	Owner	Due date
1.0 Background Information			
	<ul style="list-style-type: none"> • 3.2m Normal Fault #108, 0.8m Normal Fault #138 • Delamination mostly 0.5-1m and increasing to top of seam in parts through large area, #97-132 • TTF good, mostly 1m and able to knuckle up, up to 1.5m in parts. • Probable low angle, face parallel shear extending from TG in combination with two faults, and proximity to turnaround, creating wide spread delamination • Additional cavity to top of seam 147-149, TG goaf normal, to rear #149 and rill around 3 cans visible into goaf • Pre-consolidation in TG from Ch4001 – 3989 • Slow retreat due to gas and maintenance window last 24hr. <p style="text-align: center;">LONGWALL 104 FACE PROFILE</p> 		

Ref	Description	Owner	Due date
	<p>TG Cavities</p> <p>Fault Projection</p> <p>LVA 3D. Grosvenor Mine, LW104, 29 Apr - 02 May 2020, 14:16-14:16 (3 days) Avr Leg Pressure (MG.TG) 0 to 500 bar</p>		

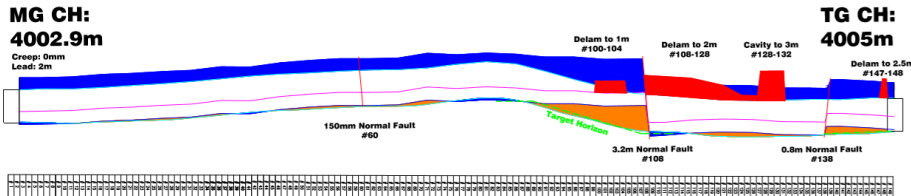

Ref	Description	Owner	Due date
2.0 Discussion Points			
	<ul style="list-style-type: none"> Interaction of structures Option of extending consolidation to TG DSI previously mobilised, gear in position 		
3.0 Plan Moving Forward			
	<ul style="list-style-type: none"> PUR 97 – 132, 4.5m up holes (C) Fill 112-116 Review opportunities for TG PCB installation work 		
Next Meeting date / Time	As required		

Actions from SMRT Meeting		
Action	Who	When
Circulate Fill Plan	JRM	Now